


# TOSHIBA

## tw300

Contrast 2,000 : 1  
3,000 ANSI-lumens  
DLP™-Technology

The business-allrounder  
with „easy to use“ - concept.



- Security functions protect against inappropriate use (password and key lock)
- „Black Board“-funktionen enable the adjustment to non-standard projection surfaces
- Thanks to rich terminals it ideally is suitable to conferencing and fixed installation
- Wireless-capable (IEEE 802.11 b / g), USB, PC card slot and LAN able (RJ45)


## tw300

the world of business projectors


- Display** 0.7" DLP™\* Chip
- Resolution** XGA 1,024 x 768 (SXGA / UXGA comp.)
- Brightness** 3,000 ANSI-lumens
- Colour reproduction** 16.7 mio. colours
- Contrast** 2,000 :1
- Projection format** 4 : 3 switchable to 16 : 9
- Lamp** 300 W (TLPLW6LAMP)
- Max. lamp life** up to max. 2,000 hours /  
up to max. 3,000 hours in ECO mode
- Lens** F = 2.4 - 3.0 / f = 23 - 31.5 mm,  
auto zoom and focus
- Zoom ratio** 1.5 x
- Frequencies (hor. / vert.)** 15 - 120 kHz / 30 - 150 Hz
- Projection** front, rear and ceiling
- Digital keystone correction** auto vertical / manual horizontal
- Picture size (diagonal)** 1.0 - 7.62 m
- Projection distance** 1.2 m - 13.8 m
- Input signal** NTSC / PAL / SECAM, 480i, 480p, 576i, 576p,  
720p, 1,080i, VGA / SVGA, XGA / SXGA / UXGA (comp.)
- Inputs** DVI, RGB (D-sub), component video (5 x BNC),  
S-video, composite video, RGB / DVI audio, video / S-video audio,  
DVI (with HDCP)
- Outputs** monitor (D-sub), audio (stereo mini jack), LAN (RJ45)
- Serial interface** RS-232C (mini DIN8 pin), LAN (RJ45)
- Power supply** AC 100 - 240 V, 50 / 60 Hz
- Loudspeaker** 2 x 5 W stereo
- Dimensions (W x H x D)** 340 x 115 x 329 mm
- Weight** 4.9 kg
- Specials** ECO mode, black board- and security-functions,  
picture-in-picture-function, split-screen-function, NCE, USB,  
PC card slot
- Accessories** remote control with laserpointer and batteries,  
owners manual (CD ROM), quick reference, RGB- and power-  
cable, softcase
- Options** ceiling mounting, trolley, spare lamp, camera c001
- Wireless communication** WLAN-capable with WLAN card,  
Wireless LAN (IEEE802.11b / g), 64 / 128 bit encoding, wep+



Projection distance (in meters)

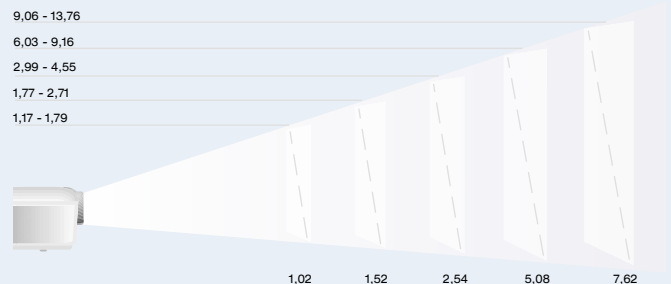

Picture size (diagonal in meters)

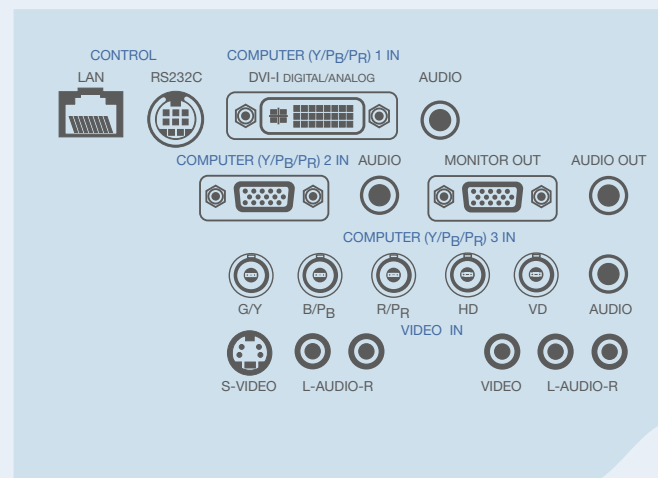

\* DLP™ and DLP™-Badge are registered trademarks of Texas Instruments.