KR310
Dual frequency RFID waterproof reader

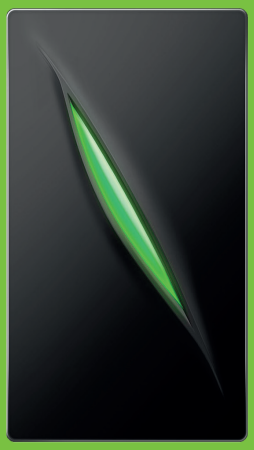

KR310 is an external wiegand reader for ZKTeco access control standalone devices and control panels. With a robust design, it is easy to connect and install, and offer the possibility to control one door from both sides. The LED lights indicate allowed or denied access. It has a proximity reading range of up to 10cm (125KHz). KR310 is waterproof, and the operating temperatures can range from -10º to +70º, it is the ideal solution for outdoor installation.

Features

- IP65 waterproof
- Dual Frequency (125kHz / 13,56MHz)
- Compatible with ID, Mifare Classic, Mifare Desfire
- 34 bit

Specifications

Compatiblity	ID, Mifare Classic, Mifare Desfire
Wiegand Signal	Wiegand 34 bit (EM/MF)
Power Supply	DC 6-14V / Max.70mA
Reading Distance	Up to 10cm (According to different working conditions and cards)
Read Time	<300ms
Operating Frequency	125KHz / 13.56MHz
Operating Temperature	-10 °C- 70 °C
Operating Humidity	10%-90%
Dimension(LxWxH)	77,5x42,8x16,5 mm

Dimensions (mm)

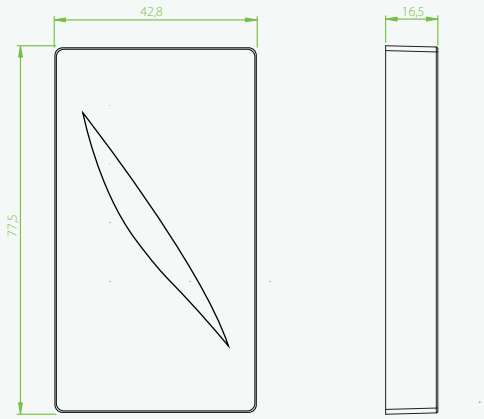

ZKTeco Europe
www.zkteco.eu
E-mail: sales@zkteco.eu

© Copyright 2017. ZKTECO CO.,LTD. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice.
All rights reserved.