

## DS-2CD2347G3-LI(2U)Y 4 MP Smart Hybrid Light Fixed Turret Network Camera

ColorVu 3.0



Hikvision ColorVu technology provides 24/7 vivid colorful images with F1.0 advanced lenses, high performance sensors and friendly lighting. F1.0 super-aperture collects more light to produce brighter images. Advanced sensor technology can vastly improve the utilization of available light.

- HiAI-ISP for excellent noise reduction effect
- 24/7 colorful imaging via ColorVu technology
- Scene-adaptive WDR
- Focus on Person and Vehicle classification based on deep learning
- Built-in arrayed dual-microphone for real-time high quality audio security
- Anti-corrosion design, providing reliability and longevity compared to standard (NEMA4X)
- Smart Hybrid Light: Integrates IR and White lights, 3 supplemental lighting modes
- Water and dust resistant (IP67)

## ▪ Specification

| Camera                      |                                                                                                                                                                                          |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor                | 1/1.8" Progressive Scan CMOS                                                                                                                                                             |
| Max. Resolution             | 2688 × 1520                                                                                                                                                                              |
| Min. Illumination           | Color: 0.0001 Lux @ (F1.0, AGC ON), 0 Lux with light                                                                                                                                     |
| Shutter Time                | 1 s to 1/100,000 s                                                                                                                                                                       |
| Day & Night                 | IR cut filter                                                                                                                                                                            |
| Angle Adjustment            | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360°                                                                                                                                     |
| Lens                        |                                                                                                                                                                                          |
| Lens Type                   | Fixed focal lens, 2.8 and 4 mm optional                                                                                                                                                  |
| Focal Length & FOV          | 2.8 mm, horizontal FOV 111.1°, vertical FOV 57.6°, diagonal FOV 138.5°<br>4 mm, horizontal FOV 95.2°, vertical FOV 48.3°, diagonal FOV 117.4°                                            |
| Lens Mount                  | M16                                                                                                                                                                                      |
| Iris Type                   | Fixed                                                                                                                                                                                    |
| Aperture                    | F1.0                                                                                                                                                                                     |
| Depth of Field              | 2.8 mm: 2.5 m to ∞<br>4 mm: 3.1 m to ∞                                                                                                                                                   |
| DORI                        |                                                                                                                                                                                          |
| DORI                        | 2.8 mm: D: 61 m, O: 24 m, R: 12 m, I: 6 m<br>4 mm: D: 75 m, O: 30 m, R: 15 m, I: 7 m                                                                                                     |
| Illuminator                 |                                                                                                                                                                                          |
| Supplement Light Type       | White Light, IR                                                                                                                                                                          |
| Supplement Light Range      | Up to 30 m                                                                                                                                                                               |
| Smart Supplement Light      | Yes                                                                                                                                                                                      |
| IR Wavelength               | 850 nm                                                                                                                                                                                   |
| Video                       |                                                                                                                                                                                          |
| Main Stream                 | 50 Hz: 25 fps (2688 × 1520, 1920 × 1080, 1280 × 720)<br>60 Hz: 30 fps (2688 × 1520, 1920 × 1080, 1280 × 720)                                                                             |
| Sub-Stream                  | 50 Hz: 25 fps (1280 × 720, 640 × 480, 640 × 360)<br>60 Hz: 30 fps (1280 × 720, 640 × 480, 640 × 360)                                                                                     |
| Third Stream                | 50 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360)<br>60 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360)<br>*The third stream is supported under certain settings. |
| Video Compression           | Main stream: H.265/H.264/H.264+/H.265+,<br>Sub-stream: H.265/H.264/MJPEG,<br>Third stream: H.265/H.264,<br>*Third stream is supported under certain settings.                            |
| Video Bit Rate              | 32 Kbps to 8 Mbps                                                                                                                                                                        |
| H.264 Type                  | Baseline Profile, Main Profile, High Profile                                                                                                                                             |
| H.265 Type                  | Main Profile                                                                                                                                                                             |
| Bit Rate Control            | CBR, VBR                                                                                                                                                                                 |
| Scalable Video Coding (SVC) | H.264 and H.265 encoding                                                                                                                                                                 |
| Region of Interest (ROI)    | 1 fixed region for main stream                                                                                                                                                           |
| Audio                       |                                                                                                                                                                                          |
| Audio Type                  | -2U: Mono sound                                                                                                                                                                          |
| Audio Compression           | -2U: G.711/G.722.1/G.726/MP2L2/PCM/MP3/AAC-LC                                                                                                                                            |

|                               |                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Audio Bit Rate                | -2U: 64 Kbps (G.711ulaw/G.711alaw)/16 Kbps (G.722.1)/16 Kbps (G.726)/16 Kbps to 64 Kbps (AAC-LC)/32 to 192 Kbps (MP2L2)/8 to 320 Kbps (MP3)                                                                                                                                                                                                                                           |
| Audio Sampling Rate           | -2U: 8 kHz/16 kHz/32 kHz/48 kHz                                                                                                                                                                                                                                                                                                                                                       |
| Environment Noise Filtering   | -2U: Yes                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Network</b>                |                                                                                                                                                                                                                                                                                                                                                                                       |
| Protocols                     | TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv4, IPv6, UDP, Bonjour, SSL/TLS, PPPoE, SNMP, WebSocket, WebSockets, SRTP, SFTP                                                                                                                                                                                               |
| Simultaneous Live View        | Up to 6 channels                                                                                                                                                                                                                                                                                                                                                                      |
| API                           | ONVIF (ProfileS, ProfileG, ProfileT), ISAPI, SDK, ISUP                                                                                                                                                                                                                                                                                                                                |
| User/Host                     | Up to 32 users<br>3 user levels: administrator, operator, and user                                                                                                                                                                                                                                                                                                                    |
| Security                      | Password protection, complicated password, HTTPS encryption, 802.1X authentication (EAP-TLS, EAP-LEAP, EAP-MD5), watermark, IP address filter, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for Open Network Video Interface, RTP/RTSP over HTTPS, control timeout settings, security audit log, TLS 1.1/1.2/1.3, host authentication (MAC address) |
| Network Storage               | NAS (NFS, SMB/CIFS), Auto Network Replenishment (ANR)                                                                                                                                                                                                                                                                                                                                 |
| Client                        | iVMS-4200, Hik-Connect, Hik-Central                                                                                                                                                                                                                                                                                                                                                   |
| Web Browser                   | Plug-in free live view: Chrome 80+, Firefox 80+, Edge 89+,<br>Local service: Chrome 80+, Firefox 80+, Edge 89+                                                                                                                                                                                                                                                                        |
| <b>Image</b>                  |                                                                                                                                                                                                                                                                                                                                                                                       |
| Image Parameters Switch       | Yes                                                                                                                                                                                                                                                                                                                                                                                   |
| Image Settings                | Rotate mode, saturation, brightness, contrast, sharpness, gain, white balance, adjustable by client software or web browser                                                                                                                                                                                                                                                           |
| Day/Night Switch              | Day, Night, Auto, Schedule                                                                                                                                                                                                                                                                                                                                                            |
| Image Enhancement             | BLC, HLC, 3D DNR, Distortion Correction, Defog                                                                                                                                                                                                                                                                                                                                        |
| SNR                           | ≥ 52 dB                                                                                                                                                                                                                                                                                                                                                                               |
| Wide Dynamic Range (WDR)      | 130 dB                                                                                                                                                                                                                                                                                                                                                                                |
| Image Stabilization           | EIS                                                                                                                                                                                                                                                                                                                                                                                   |
| Privacy Mask                  | 4 programmable polygon privacy masks                                                                                                                                                                                                                                                                                                                                                  |
| <b>Interface</b>              |                                                                                                                                                                                                                                                                                                                                                                                       |
| Ethernet Interface            | 1 RJ45 10 M/100 M self-adaptive Ethernet port                                                                                                                                                                                                                                                                                                                                         |
| On-Board Storage              | Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 512 GB                                                                                                                                                                                                                                                                                                     |
| Audio                         | Built-in Microphone:<br>-2U: Arrayed dual-microphone                                                                                                                                                                                                                                                                                                                                  |
| Reset Key                     | Yes                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Event</b>                  |                                                                                                                                                                                                                                                                                                                                                                                       |
| Basic Event                   | Motion detection (support alarm triggering by specified target types (human and vehicle)), video tampering alarm, exception                                                                                                                                                                                                                                                           |
| Smart Event                   | Scene change detection                                                                                                                                                                                                                                                                                                                                                                |
| Linkage                       | Upload to FTP/NAS/memory card, notify surveillance center, trigger recording, trigger capture, send email                                                                                                                                                                                                                                                                             |
| <b>Deep Learning Function</b> |                                                                                                                                                                                                                                                                                                                                                                                       |
| Face Capture                  | Yes                                                                                                                                                                                                                                                                                                                                                                                   |

|                                  |                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Perimeter Protection             | Line crossing, intrusion, region entrance, region exiting<br>Support alarm triggering by specified target types (human and vehicle)                                                                                                                                                                                                                   |
| <b>General</b>                   |                                                                                                                                                                                                                                                                                                                                                       |
| Power                            | 12 VDC $\pm$ 25%, 0.7 A, max. 8.5 W, $\varnothing$ 5.5 mm coaxial power plug, reverse polarity protection,<br>PoE: IEEE 802.3af, Class 3, max. 11 W                                                                                                                                                                                                   |
| Material                         | Cover: Metal, main body: Metal                                                                                                                                                                                                                                                                                                                        |
| Dimension                        | $\varnothing$ 138.3 mm $\times$ 115.4 mm ( $\varnothing$ 5.4" $\times$ 4.5")                                                                                                                                                                                                                                                                          |
| Package Dimension                | 170 mm $\times$ 170 mm $\times$ 160 mm (6.7" $\times$ 6.7" $\times$ 6.3")                                                                                                                                                                                                                                                                             |
| Weight                           | Approx. 750 g (1.7 lb.)                                                                                                                                                                                                                                                                                                                               |
| With Package Weight              | Approx. 1140 g (2.5 lb.)                                                                                                                                                                                                                                                                                                                              |
| Storage Conditions               | -30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)                                                                                                                                                                                                                                                                             |
| Startup and Operating Conditions | -30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)                                                                                                                                                                                                                                                                             |
| General Function                 | Heartbeat, mirror, flash log, password reset via email, pixel counter, anti-banding                                                                                                                                                                                                                                                                   |
| Language                         | 33 languages: English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil), Ukrainian |
| <b>Approval</b>                  |                                                                                                                                                                                                                                                                                                                                                       |
| EMC                              | CE-EMC: EN 55032:2015+A1:2020, EN 50130-4:2011+A1:2014, EN IEC 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021,<br>RCM: AS/NZS CISPR 32: 2015,<br>IC: ICES-003: Issue 7,<br>KC: KN32: 2015, KN35: 2015                                                                                                                                      |
| Safety                           | UL: UL 62368-1,<br>CB: IEC 62368-1: 2014+A11,<br>CE-LVD: EN 62368-1: 2014/A11: 2017                                                                                                                                                                                                                                                                   |
| Environment                      | CE-RoHS: 2011/65/EU                                                                                                                                                                                                                                                                                                                                   |
| Protection                       | IP67: IEC 60529-2013                                                                                                                                                                                                                                                                                                                                  |
| Anti-Corrosion Protection        | NEMA 4X (NEMA 250-2018)                                                                                                                                                                                                                                                                                                                               |

## ▪ Typical Application

Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.

This model has MODERATE PROTECTION.

| Level                  | Description                                                                                                                                                                                                                                            |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Top-level protection   | Hikvision products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more.                                             |
| Moderate protection    | Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2 kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain. |
| No specific protection | Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed.                                                                                                                                  |

## ▪ Available Model

DS-2CD2347G3-LI2UY(2.8mm)

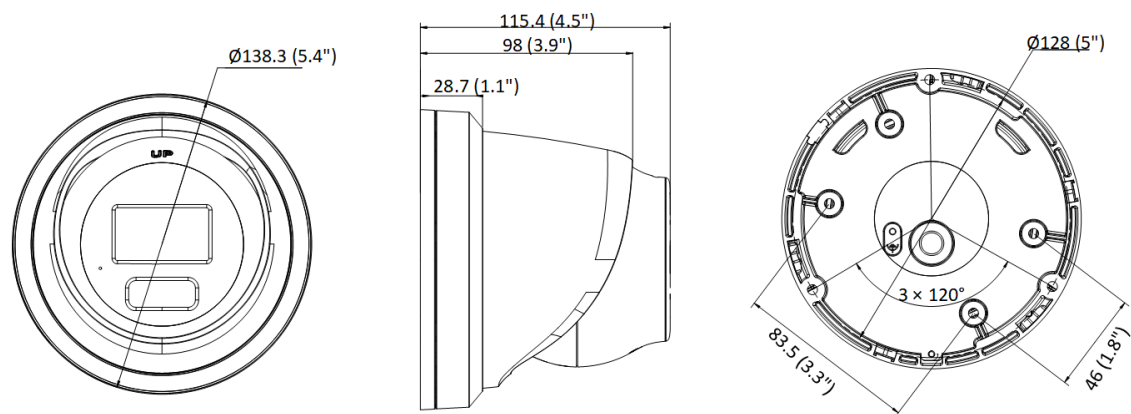
DS-2CD2347G3-LI2UY(4mm)

DS-2CD2347G3-LI2UY(2.8mm)(Black)

DS-2CD2347G3-LIY(2.8mm)

DS-2CD2347G3-LIY(4mm)

## ▪ Dimension



Unit: mm (inch)







## ▪ Accessory

### ▪ Optional

| DS-1273ZJ-140 | DS-1273ZJ-140B  | DS-1271ZJ-140    | DS-1275ZJ-SUS     | DS-1276ZJ-SUS    |
|---------------|-----------------|------------------|-------------------|------------------|
|               |                 |                  |                   |                  |
| DS-1280ZJ-PT6 | DS-2280ZJ-WA140 | DS-2200ZJ-WA-140 | DS-2200ZJ-WAJ-140 | DS-2210ZJ-WA-140 |
|               |                 |                  |                   |                  |

## ▪ Installation Methods

| Wall Mounting<br>DS-1273ZJ-140 | Wall Mounting<br>DS-1273ZJ-140B+DS-1280ZJ-PT6 | Wall Mounting<br>DS-2200ZJ-WA-140+DS-1253ZJ-L | Wall Mounting<br>DS-2200ZJ-WAJ-140 | Pendant Mounting<br>DS-1271ZJ-140 |
|--------------------------------|-----------------------------------------------|-----------------------------------------------|------------------------------------|-----------------------------------|
|--------------------------------|-----------------------------------------------|-----------------------------------------------|------------------------------------|-----------------------------------|

|                                                                                   |                                                                                   |                                                                                     |                                                                                    |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |    |  |  |
| <b>Pendant Mounting</b><br><b>DS-2210ZJ-WA-140+D</b><br><b>S-1280ZJ-PT6</b>       | <b>Vertical Pole Mounting</b><br><b>DS-1275ZJ-SUS+DS-22</b><br><b>00ZJ-WA-140</b> | <b>Corner Mounting</b><br><b>DS-1276ZJ-SUS+DS-12</b><br><b>73ZJ-140+DS-1253ZJ-L</b> | <b>Junction Box</b><br><b>DS-1280ZJ-PT6</b>                                        | <b>Junction Box</b><br><b>DS-2280ZJ-WA140</b>                                       |
|  |  |    |  |  |

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

