DS-K4H258-LZ

Accessary of Magnetic Lock

AVAILABLE MODEL

DS-K4H258-LZ LZ-Bracket of Magnetic Lock

MAIN FEATURES

- Adopts aldural material
- Hard anodizing electroplating operated
- L-bracket is used for fixing the lock body;
  Z-bracket is used for fixing the armature plate
- Suitable for wooden door, and metal door

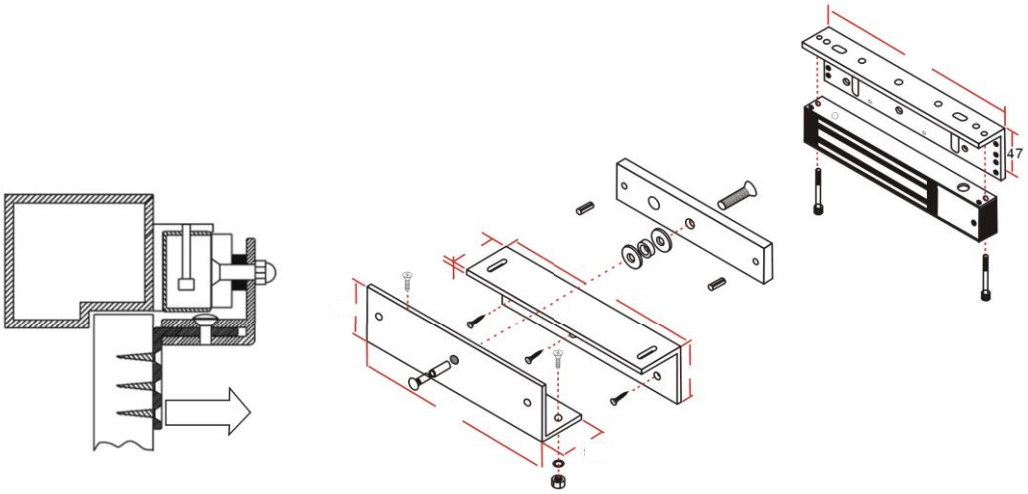


SPECIFICATION

Model	DS-K4H258-LZ
L-bracket Dimension (L×W×H)	238×30×47mm (9.4×1.2×1.9")
Z-bracket Dimension (L×W×H)	185×44×100mm (7.3×1.7×3.9")
Suitable Door	Wooden Door, and Metal Door
Shell Performance	Hard Anodizing Electroplated
Weight	0.77kg

INSTALLATION

1 . For in-swing door, install the lock body inside and then need to install the ZL bracket at the same time
2 . Discharge the mounting plate from lock body.
Fix the L bracket on the door frame and then fix the lock body on the L bracket.
3 . Assemble the Z bracket and then fix it on the door frame
4 Fix the armature plate on the Z bracket


47