



FVT-2201 Version: 1

10/100BASE-TX to 100BASE-FX SMF SC Converter, 20km

The FVT-2201 SMF SC media converter is able to convert network signals between copper and fiber-optic based networks. The converter provides a 10/100Base-TX RJ-45 port, supports full duplex and half duplex switch connectivity and 10Base-T and 100Base-TX auto-sensing. Used in single-mode with fibre-optic cabling, this can extend a network range up to 20km.

The device features built-in Dip switches for easy converter configuration, which function on the Smart LFP (Link Fault Pass-through), allowing the converter to monitor both the fiber and copper ports for signal loss, as well as converter transmission method, auto-negotiation mode for adjusting copper speed and full & half duplex mode.

The FVT-2201 is able to operate in temperatures from -10° up to 55° Celsius. The converter can be used as a standalone unit or as a slide-in module to the CHV-2000 19-inch Converter Chassis, which can accommodate up to 14 units for use in a central wiring closet.



- 1. 10/100Mbps Fiber Port
- 2. LED Indicators
- 3. 10/100Mbps RJ-45 Port



- 4. DC Power Jack
- 5. Dip Switch

Key Features

- Transfers data from 10/100Base-TX copper to fiber interfaces
- Single-mode fiber with SC connector for transmission of up to 20km
- Built-in LFP (Link Fault Pass-through) Technology



- IEEE 802.3x Flow Control protects against lost packets for reliable data transmission
- Dip switches for customized configuration
- Supports low-time lag transmission
- Supports the transmission of extra-long packets up to 1.6KB
- -10°C ~ 55°C operating temperature range

Works Well With



CVH-2000
14-Slot Media Converter Chassis



FVT-2401
10/100BASE-TX to 100BASE-FX SMF SC Converter, 40km

Specifications

System Specifications

Connectors and Cabling:

1 x 100Base-FX Single-mode duplex SC
Fiber cable: 8.3/125um, 9/125um, 10/125um

1 x 10/100Base-TX RJ-45 Port, auto MDI/MDI-X and Auto-Negotiation
CAT-5 Twisted Pair cable

Wavelength(nm):

1310nm

Indicator:

PWR, TX (FDX, 100, Link/Act), FX (102, Link/Act)

Transmission Method:

Store and forward (Default)

Power:

DC 5V/1A

Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet
IEEE 802.3u 100-BASE-TX, Fast Ethernet
IEEE 802.3x Flow Control (full-duplex flow control)

Features

General:

DIP Switch 1: LFP function
DIP Switch 2: Transmission Mode
DIP Switch 3: Auto/Force the UTP port work mode
DIP Switch 4: 10/100M for UTP port
DIP Switch 5: Full/Half Duplex mode for UTP port
DIP Switch 6: Normally close

Performance

Operating Distance:

Fiber connection up to 20km

Environment

Temperature (°C):

Storage: -40 ~ 75 °C

Operating: -10 ~ 55 °C

Humidity (Non-condensing):

5 ~ 90 %

Physical Specifications

Dimensions (W x D x H mm):

71 x 94 x 26 mm

Weight (g):

420 g

Others


Approval and Compliance:

CE, FCC

Deployment:

Desk, chassis mounted

_____ Ethernet Cable (RJ 45)
 ===== Fiber

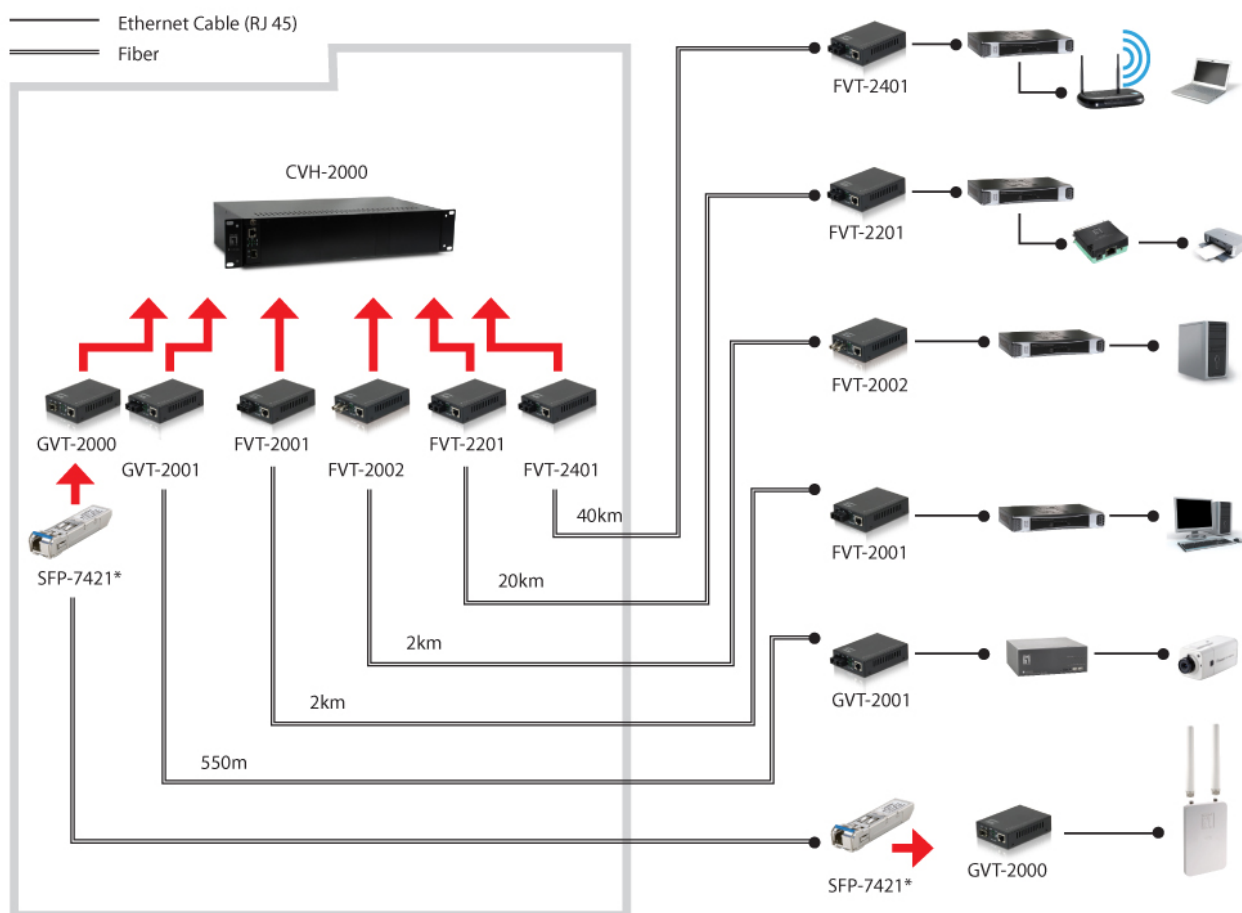

Order Information

Package Contents

Quick Installation Guide

14-Slot Media Converter Chassis

Page 4 of 5

All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.