
UniFi 5G Backup

U5G

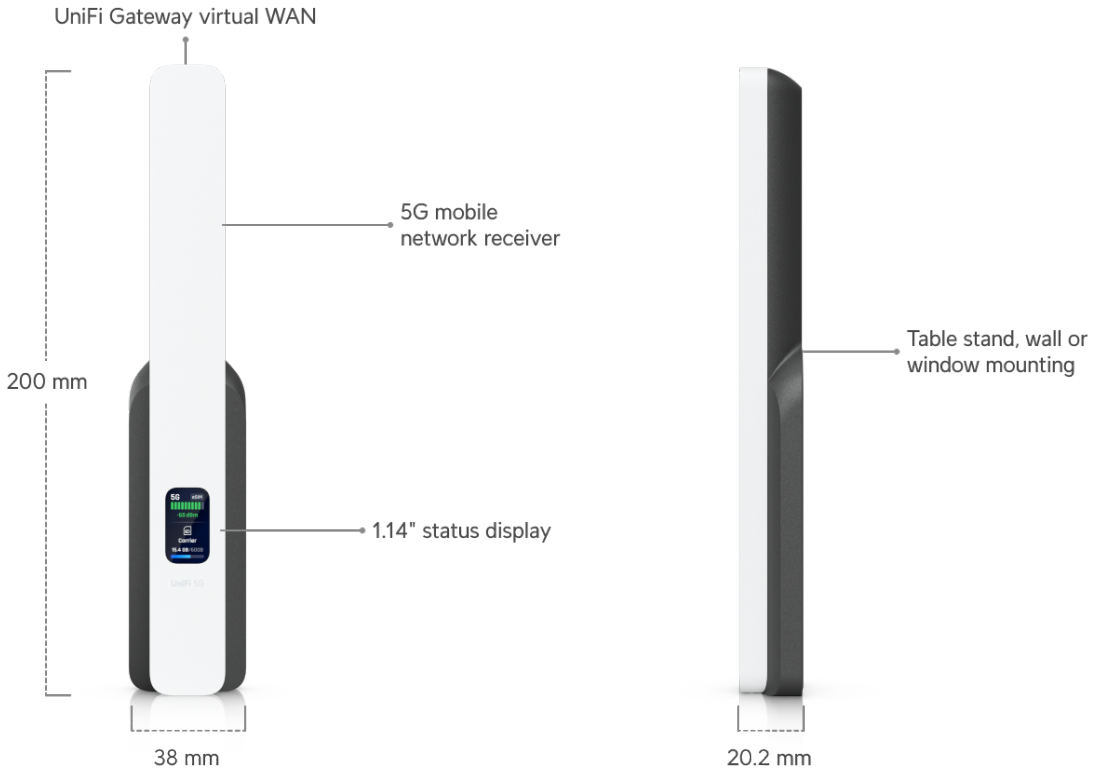

Overview

Dimensions	Device: 200 x 38 x 20.2 mm (7.9 x 1.5 x 0.8") Table stand: 48.1 x 48 x 55.2 mm (1.9 x 1.9 x 2.2")
Networking Interface	(1) GbE RJ45 port 5G RedCap and LTE
SIM	(1) Nano SIM (4FF) (1) eSIM
PoE Interface	(1) PoE input
Mounting	Desktop stand, wall, window mount (Included)

Mechanical

Weight	Device: 122 g (4.3 oz) Stand: 138 g (4.9 oz) Wall mount: 66 g (2.3 oz)
Enclosure Material	Polycarbonate, aluminum alloy
Mount Material	Galvanized steel, silicone rubber

Hardware

Management	Ethernet
5G NR	
• Category	5G RedCap
• Frequency Bands	n1, n3, n5, n7, n8, n20, n26, n28, n40, n41, n77, n78
• Max. TX Power	23 dBm
4G LTE	
• Frequency Bands	B1, B3, B5, B7, B8, B18, B19, B20, B26, B28, B38, B40, B41, B42, B43
• Max. TX Power	HPUE power class 2: 26 dBm
Peak Data Speed	
• 5G SA	Downlink 220 Mbps / Uplink 120 Mbps
• 4G LTE	Downlink 195 Mbps / Uplink 100 Mbps
Antennas	
• Type	(2) Embedded omni-directional cellular antennas
Power Method	PoE
Display	1.14" status display

Buttons	(1) Factory-reset
Ambient Operating Temperature	0 to 40 °C (32 to 104 °F)
Ambient Operating Humidity	5 to 95% noncondensing
Certifications	CE

Software

Application Requirements

• UniFi Network	Version 10.4.57 and later
• Mobile App	UniFi iOS™ version 10.35.0 and later UniFi Android™ version 10.38.2 and later